#### **ELECTRIC SCISSOR LIFTS**



## **OPTIMUM 8**

















# BEST DRIVING AND LIFTING EXPERIENCE

- > AC powered
- > High precision driving
- > Proportional and quick movements
- > Best turning radius

#### **UTMOST VERSATILITY**

- Ability to go through standard doorways
- > Mobile potholes protection
- > Indoor outdoor rated

## MINIMAL MAINTENANCE AND DOWNTIME

- > Maintenance free AC motors
- > 2 easy access swing-out trays
- > Haulotte Activ'Screen (onboard diagnostic)
- > Smart transportability

#### **LONGER LIFE TIME**

- > Haulotte Activ'Energy Management takes care of your batteries
- > Extreme robustness
- Optimized total cost of ownership






## **ELECTRIC SCISSOR LIFTS**

#### TECHNICAL DATA

Working height 7.77 m Platform height 5.77 m  Max. drive working height 5.77 m  Lift capacity - inside 230 kg (2 pers.) Lift capacity - outside 230 kg (1 pers.) Lift capacity on the extension deck 120 kg  Platform length - outside 1.72 m  Platform length - extended 2.59 m  Length - extension 0.86 m  Platform width - outside 0.74 m  Platform width - outside 0.74 m  Platform width - outside 1.98 m  Overall width 0.79 m  Length 1.9 m  Meelbase 1.38 m  Ground clearance - center 8.7 cm  Ground clearance - deployed potholes 2 cm  Drive speed 0.5 - 4.5 km/h  Gradeability 25 %  Tilt 1.5°/3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	<del></del>	OPTIMUM 8
Max. drive working height  Lift capacity - inside  Lift capacity - outside  Lift capacity on the extension deck  Platform length - outside  Platform length - extended  Platform width - outside  1.98 m  Pustore and the instance of	Working height	7.77 m
Lift capacity - inside  Lift capacity - outside  Lift capacity on the extension deck  A Platform length - outside  B Platform length - extended  Length - extension  Platform width - outside  Platform width - outside  Platform width - outside  O.74 m  Height - stowed  Overall width  C Poverall width  D Heelbase  C Consum Clearance - center  C Ground clearance - deployed potholes  Drive speed  Drive speed  C Consumption  Length  C Consumption  Length  C Consumption  Length  L	Platform height	5.77 m
Lift capacity - outside  Lift capacity on the extension deck  120 kg  Platform length - outside  1.72 m  Platform length - extended  2.59 m  Length - extension  Platform width - outside  0.74 m  Platform width - outside  1.98 m  Overall width  0.79 m  Length  H Wheelbase  1.38 m  Ground clearance - center  Ground clearance - deployed potholes  Drive speed  0.5 - 4.5 km/h  Gradeability  25 %  Tilt  1.5° / 3°  Turning radius - outside  1.5 m  Batteries  24 V - 225 Ah  Hydraulic system capacity  7 l	Max. drive working height	5.77 m
Lift capacity on the extension deck  A Platform length - outside  B Platform length - extended  2.59 m  Length - extension  O.86 m  Platform width - outside  0.74 m  Height - stowed  1.98 m  Overall width  0.79 m  Length  Length  1.9 m  Wheelbase  1.38 m  Ground clearance - center  Ground clearance - deployed potholes  2 cm  Drive speed  0.5 - 4.5 km/h  Gradeability  25 %  Tilt  1.5° / 3°  Turning radius - outside  1.5 m  Batteries  24 V - 225 Ah  Hydraulic system capacity  7 l	Lift capacity - inside	230 kg (2 pers.)
A Platform length - outside  1.72 m  Platform length - extended 2.59 m  Length - extension 0.86 m  Platform width - outside 0.74 m  Height - stowed 1.98 m  Overall width 0.79 m  Length 1.9 m  Wheelbase 1.38 m  Ground clearance - center 8.7 cm  Ground clearance - deployed potholes 2 cm  Drive speed 0.5 - 4.5 km/h  Gradeability 25 %  Tilt 1.5° / 3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	Lift capacity - outside	230 kg (1 pers.)
B Platform length - extended 2.59 m  Length - extension 0.86 m  Platform width - outside 0.74 m  Height - stowed 1.98 m  Overall width 0.79 m  Length 1.9 m  Wheelbase 1.38 m  Ground clearance - center 8.7 cm  Ground clearance - deployed potholes 2 cm  Drive speed 0.5 - 4.5 km/h  Gradeability 25 %  Tilt 1.5°/3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	Lift capacity on the extension deck	120 kg
Length - extension 0.86 m  Platform width - outside 0.74 m  Height - stowed 1.98 m  Coverall width 0.79 m  Length 1.9 m  Wheelbase 1.38 m  Ground clearance - center 8.7 cm  Ground clearance - deployed potholes 2 cm  Drive speed 0.5 - 4.5 km/h  Gradeability 25 %  Tilt 1.5°/3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	A Platform length - outside	1.72 m
<ul> <li>Platform width - outside</li> <li>D Height - stowed</li> <li>1.98 m</li> <li>Overall width</li> <li>0.79 m</li> <li>Length</li> <li>1.9 m</li> <li>Wheelbase</li> <li>1.38 m</li> <li>Ground clearance - center</li> <li>8.7 cm</li> <li>Ground clearance - deployed potholes</li> <li>2 cm</li> <li>Drive speed</li> <li>0.5 - 4.5 km/h</li> <li>Gradeability</li> <li>25 %</li> <li>Tilt</li> <li>1.5° / 3°</li> <li>Turning radius - outside</li> <li>1.5 m</li> <li>Batteries</li> <li>24 V - 225 Ah</li> <li>Hydraulic system capacity</li> <li>7 l</li> </ul>	B Platform length - extended	2.59 m
<ul> <li>D Height - stowed</li> <li>D Overall width</li> <li>Overall width</li> <li>O.79 m</li> <li>Length</li> <li>1.9 m</li> <li>Wheelbase</li> <li>1.38 m</li> <li>Ground clearance - center</li> <li>8.7 cm</li> <li>Ground clearance - deployed potholes</li> <li>2 cm</li> <li>Drive speed</li> <li>0.5 - 4.5 km/h</li> <li>Gradeability</li> <li>25 %</li> <li>Tilt</li> <li>1.5°/3°</li> <li>Turning radius - outside</li> <li>1.5 m</li> <li>Batteries</li> <li>24 V - 225 Ah</li> <li>Hydraulic system capacity</li> <li>7 l</li> </ul>	Length - extension	0.86 m
<b> ■</b> Overall width0.79 m <b> ⑤</b> Length1.9 m <b> •</b> Wheelbase1.38 m <b> •</b> Ground clearance - center8.7 cm <b> 6</b> Ground clearance - deployed potholes2 cm <b> Drive speed</b> 0.5 - 4.5 km/h <b> 6</b> Gradeability25 % <b> 7</b> Tilt1.5°/3° <b> 7</b> Turning radius - outside1.5 m <b> 8</b> Batteries24 V - 225 Ah <b> Hydraulic system capacity</b> 7 l	C Platform width - outside	0.74 m
G Length  1.9 m  Wheelbase  1.38 m  Ground clearance - center  8.7 cm  Ground clearance - deployed potholes  Drive speed  0.5 - 4.5 km/h  Gradeability  25 %  Tilt  1.5° / 3°  Turning radius - outside  1.5 m  Batteries  24 ∨ - 225 Ah  Hydraulic system capacity  7 l	Height - stowed	1.98 m
<ul> <li>₩ Wheelbase</li> <li>1.38 m</li> <li>⑤ Ground clearance - center</li> <li>8.7 cm</li> <li>⑥ Ground clearance - deployed potholes</li> <li>2 cm</li> <li>Drive speed</li> <li>0.5 - 4.5 km/h</li> <li>⑥ Gradeability</li> <li>25 %</li> <li>Tilt</li> <li>1.5° / 3°</li> <li>Turning radius - outside</li> <li>1.5 m</li> <li>Batteries</li> <li>24 V - 225 Ah</li> <li>Hydraulic system capacity</li> <li>7 l</li> </ul>	Overall width	0.79 m
Ground clearance - center 8.7 cm  Ground clearance - deployed potholes 2 cm  Drive speed 0.5 - 4.5 km/h  Gradeability 25 %  Tilt 1.5°/3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	<b>6</b> Length	1.9 m
Ground clearance - deployed potholes 2 cm  Drive speed 0.5 - 4.5 km/h  Gradeability 25 %  Tilt 1.5° / 3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	Wheelbase	1.38 m
Drive speed 0.5 - 4.5 km/h Gradeability 25 % Tilt 1.5°/3° Turning radius - outside 1.5 m Batteries 24 V - 225 Ah Hydraulic system capacity 7 l	Ground clearance - center	8.7 cm
Gradeability 25 %  Tilt 1.5°/3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	Ground clearance - deployed potholes	2 cm
Tilt 1.5°/3°  Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	Drive speed	0.5 - 4.5 km/h
Turning radius - outside 1.5 m  Batteries 24 V - 225 Ah  Hydraulic system capacity 7 l	Gradeability	25 %
Batteries 24 V - 225 Ah Hydraulic system capacity 7 l	Tilt	1.5° / 3°
Hydraulic system capacity 7 l	Turning radius - outside	1.5 m
	Batteries	24 V - 225 Ah
Weight 1 590 kg	Hydraulic system capacity	7 l
	Weight	1 590 kg

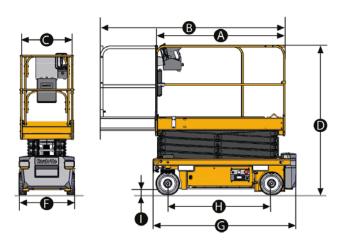

## **STANDARD** EQUIPMENT

- > Haulotte Activ Energy Management: Smart CAN charger
- > 24 V electric drive brushless AC motors
- > Battery level indicator on upper and lower control boxes
- > Haulotte Activ'Screen (battery charge, hourmeter, service alert & failures icons in code or in full text...)
- > Pothole guards
- > 2 swing out trays
- > Lateral fork lifting pockets
- > 2 front steering and 2 rear driving wheels
- > Proportional controls
- > Electric or manual break release system
- > Tilt sensor
- > Lifting and stowage points
- > Non marking tyres

#### **OPTIONS** AND ACCESSORIES

- > Haulotte Activ'Energy Management: automatic or manual batteries waterfilling system
- > Folding guardrails
- > AC power to platform
- > Hydraulic oil for cold countries
- > Telematics ready
- > Flashing light (standard in AUS / NZ)
- > Dual flashing lights
- > Working light
- > Panel carrier
- > AGM maintenance-free batteries

